

# Pressure Sensor Air PSP

www.bosch-motorsport.com



**BOSCH**  
Invented for life



- ▶ Absolute air pressure measurement
- ▶ Measurement range 0.2 to 3.0 bar
- ▶ Analog output
- ▶ Very short response time

This sensor is designed to measure absolute air-pressure, especially the air box pressure of gasoline or Diesel engines.

An integrated circuit combines a piezo-resistive sensor element and an electronic for signal-amplification and temperature compensation. The output of the sensor is an analog, ratio metric signal.

The main feature and benefit of this sensor is the combination of both high quality production part and motorsport connector.

## Application

Application	0.2 to 3 bar (a)
Pressure reference type	absolute
Max. pressure	5 bar
Operating temp. range	-40 to 125°C
Media temp. range	-40 to 125°C
Storage temp. range	-40 to 130°C
Max. vibration	0.19 mm at 100 to 200 Hz 250 m/s <sup>2</sup> at 200 to 500 Hz

## Technical Specifications

### Mechanical Data

Mounting	M6
Fitting	12.05 mm
Weight w/o wire	17 g
Sealing	O-ring 7.59 x 2.62 mm

### Electrical Data


Power supply $U_s$	4.5 to 5.5 V
Max power supply $U_s$ max	16 V
Full scale output $U_A$ at 5 V	0.3 to 4.8 V
Current $I_s$	9 mA

### Characteristic


Response time T10/90	0.2 ms
Compensated range	10 to 85°C
Tolerance (FS) at $U_s = 5$ V	$\pm 0.042$ bar
Tolerance (FS)	$\pm 1.4$ %

Sensitivity	1,518 mV/bar
Offset	96 mV

**Tolerance**

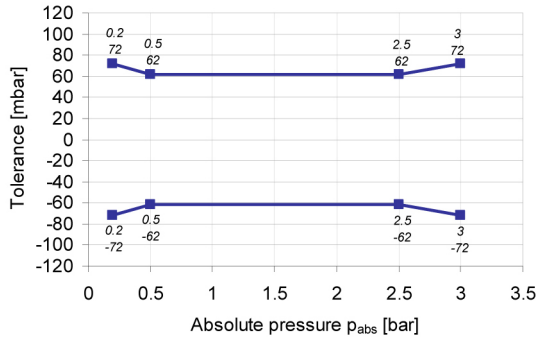

**Expansion of Tolerance**

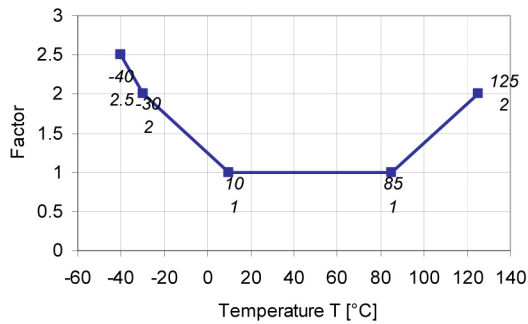

**Connectors and Wires**

Connector	ASL 6-06-05PC-HE
Mating connector	F 02U 000 228-01
ASL 0-06-05SC-HE	
Pin 1	-
Pin 2	Gnd
Pin 3	Sig
Pin 4	$U_s$
Pin 5	-

Various motorsport and automotive connectors are available on request.

Sleeve	DR-25
Wire size	AWG 24
Wire length L	15 to 100 cm

Please specify the required wire length with your order.

**Installation Notes**

The PSP is designed for engines using ROZ95, ROZ98, M15, E22 and Diesel.

The sensor can be connected directly to most control units.


To avoid noise, an ECU-input circuit with a RC-low pass filter ( $\tau = 2$  ms) is recommended.

Use engine oil (5W40) as O-Ring grease (no silicone based grease).

Avoid miss-pinning (max. 5 minutes at  $I = 0.3$  A).

Please find further application hints in the offer drawing and free download of the sensor configuration file (\*.sdf) for the Bosch Data Logging System at our homepage.

To avoid damage caused by condensate the maximum mounting position from vertical is  $+60^\circ$ .




**Safety Note**

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

**Ordering Information**

**Pressure Sensor Air PSP**  
Order number **B 261 209 690-01**

Dimensions

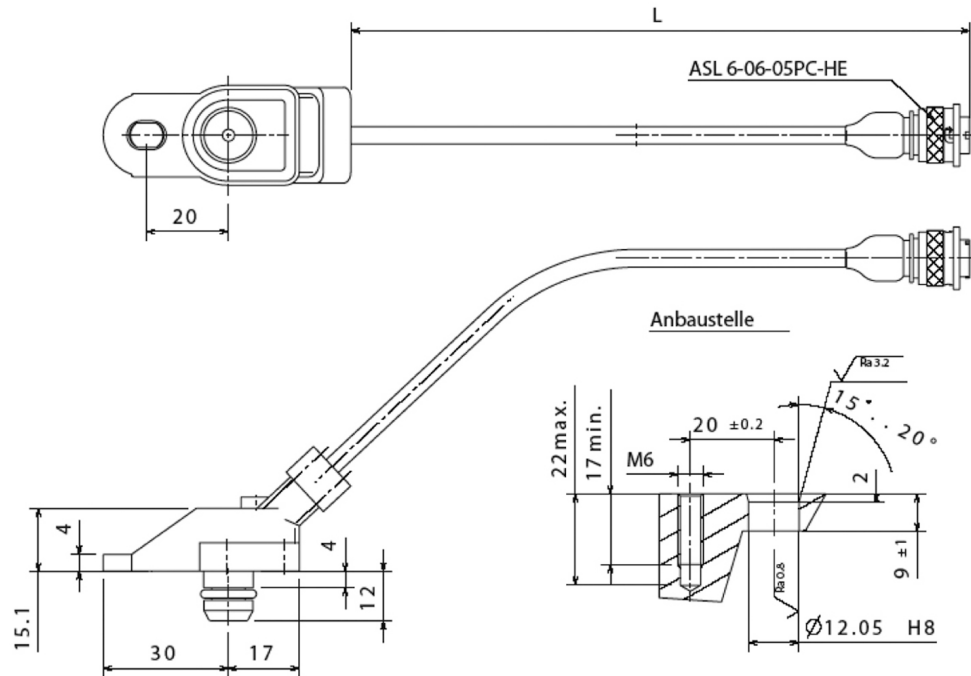

Represented by:

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 9101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North America:**  
 Bosch Engineering North America  
 Motorsport  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Latin America:**  
 Robert Bosch Ltda  
 Motorsport  
 Av Juscelino Kubitschek de  
 Oliveira 11800  
 Zip code 81460-900  
 Curitiba - Parana  
 Brasilia  
 Tel.: +55 41 3341 2057  
 Fax: +55 41 3341 2779

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motorsport  
 18F Queen's Tower C, 2-3-5 Minato Mirai  
 Nishi-ku, Yokohama-shi  
 Kanagawa 220-6218  
 Japan  
 Tel.: +81 45 650 5610  
 Fax: +81 45 650 5611  
 www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
 Robert Bosch Pty. Ltd  
 Motorsport  
 1555 Centre Road  
 Clayton, Victoria, 3168  
 Australia  
 Tel.: +61 (3) 9541 3901  
 motor.sport@au.bosch.com