

Rotary Position Sensor RP 100-H red

www.bosch-motorsport.com



BOSCH
Invented for life



- ▶ Rotational position measurement
- ▶ Measurement range 100° full redundancy
- ▶ Operating temperature -40 to 125°C
- ▶ Accuracy $\leq \pm 0.5\%$ FS

This sensor is designed to measure the rotational position of the acceleration pedal.

The electronic is designed with a magnetic rotary sensor with Hall elements and digital signal processing. The angular position is provided by a two pole magnet integrated in the sensor shaft. A Hall effect sensor is disposed between two magnets in association with a movable specially formed ferromagnetic part. This is used to control flux in the sensor in order to produce a linearly varying output voltage dependent on the position.

The main benefit of this sensor is its contactless Hall effect technology and its robust design for motorsport applications.

Application

Application	100° full redundancy
Operating temperature range	-40 to 125°C
Max. Vibration	Vibration Profile 1 (see Appendix or www.bosch-motorsport.com)

Technical Specifications

Mechanical Data


Weight w/o wire	50 g
Protection class	IP67
Mounting	2 x M4
Lifetime	50 x 10 ⁶ rotations
Housing	Aluminum alloy

Electrical Data

Power supply U_s	5 V \pm 0.5 V
Current I_S	< 40 mA

Characteristic

Max. rotation speed	120 min ⁻¹
Accuracy	< $\pm 0.5\%$ FS
Direction of rotation	Clockwise

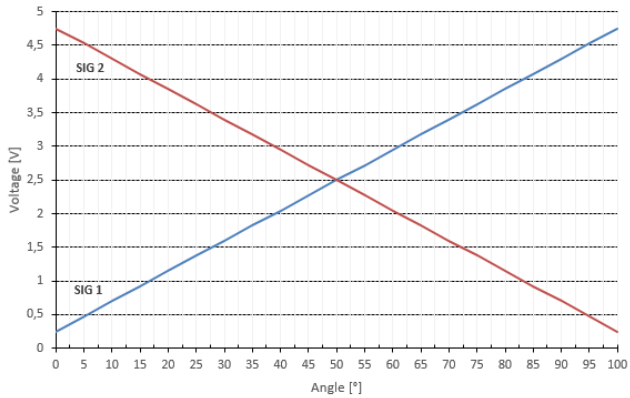

Connectors and Wires

Connector AS 6-07-35PN	F 02U 000 424-01
Mating connector AS 0-07-35SN	F 02U 000 238-01
Pin 1	Power 5 V Sensor 1
Pin 2	Ground Sensor 1
Pin 3	Signal Sensor 1
Pin 4	Power 5 V Sensor 2
Pin 5	Ground Sensor 2
Pin 6	Signal Sensor 2
Sleeve	DR-25
Wire size	AWG 24
Wire length L	150 to 750 ± 5 mm

Installation Notes

The sensor can be connected directly to most control units.

The sensor is designed with contactless Hall effect technology.

Each mounting orientation is possible.

Sensor is at mid point of electrical angle when shaft and wire exit are aligned as shown in the offer drawing.




Safety Note

The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Ordering Information

Rotary Position Sensor RP 100-H red
Order number **F 02U V02 196-01**

Dimensions

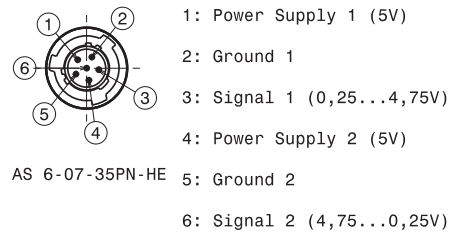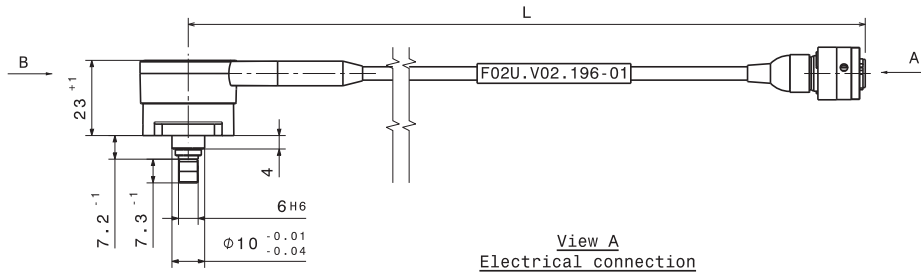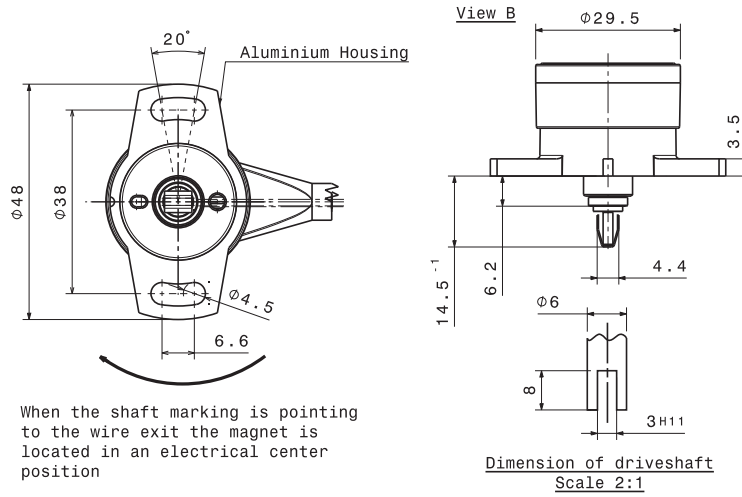

AS 6-07-35PN-HE

Represented by:

Europe:
Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:
Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Latin America:
Robert Bosch Ltda
Motorsport
Av Juscelino Kubitschek de
Oliveira 11800
Zip code 81460-900
Curitiba - Parana
Brasil
Tel.: +55 41 3341 2057
Fax: +55 41 3341 2779

Asia-Pacific:
Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato Mirai
Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:
Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com